


Foot Controls

NLB manufactures rugged, dependable foot control valves to actuate the high-pressure water when the operator has both hands busy, in applications such as tube or pipe cleaning. As with the high-pressure cleaning lances, there are two types of foot control valves: dump type and shut-off type

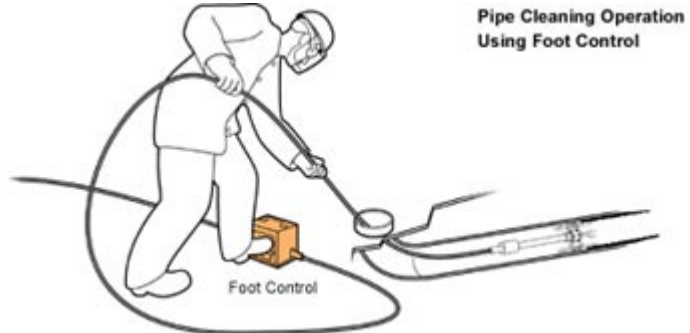

FEATURES/BENEFITS

- Entire valve mechanism enclosed in a steel box.
- Minimal foot pressure required for pedal actuation.
- Quick-change cartridge makes FC10-286 and FC10-800 rebuildable in under 60 seconds
- Valve enclosure doubles as convenient carrying case.
- All wetted parts are of stainless steel construction.
- Maintenance is fast and easy using NLB repair kits.



FC10-286

- New pedal design* allows operator to force valve into dump mode.
- Dual dump port maintain stability
- Flow rating to 25gpm (95 lpm)
- Rebuild in under 60 seconds.

*Patent No. 5,636,789



Quick-change cartridge seal



FC10-800

- New pedal design* with latch to prevent accidental actuation; also lets operator initiate dump mode.
- High flow: up to 80 gpm (303 lpm)
- Dual dump port maintaining stability.
- Rebuild in under 60 seconds.



Click on a model number for details and ordering information

Model No.	Type	Pressure Rating	Weight
FC-250	Dump	10,000 psi (700 bar)	31 lbs. (14.1 kg)
FC-300	Dry Shut-Off	10,000 psi (700 bar)	30 lbs. (13.6 kg)
FC10-286	Dump	10,000 psi (700 bar)	21 lbs. (9.5 kg)
FC10-800	Dump	10,000 psi (700 bar)	27 lbs. (12.3 kg)
FC20-250	Dump	20,000 psi (1,400 bar)	57 lbs. (25.9 kg)