


Hydrodemolition Production Rate Estimation Guide

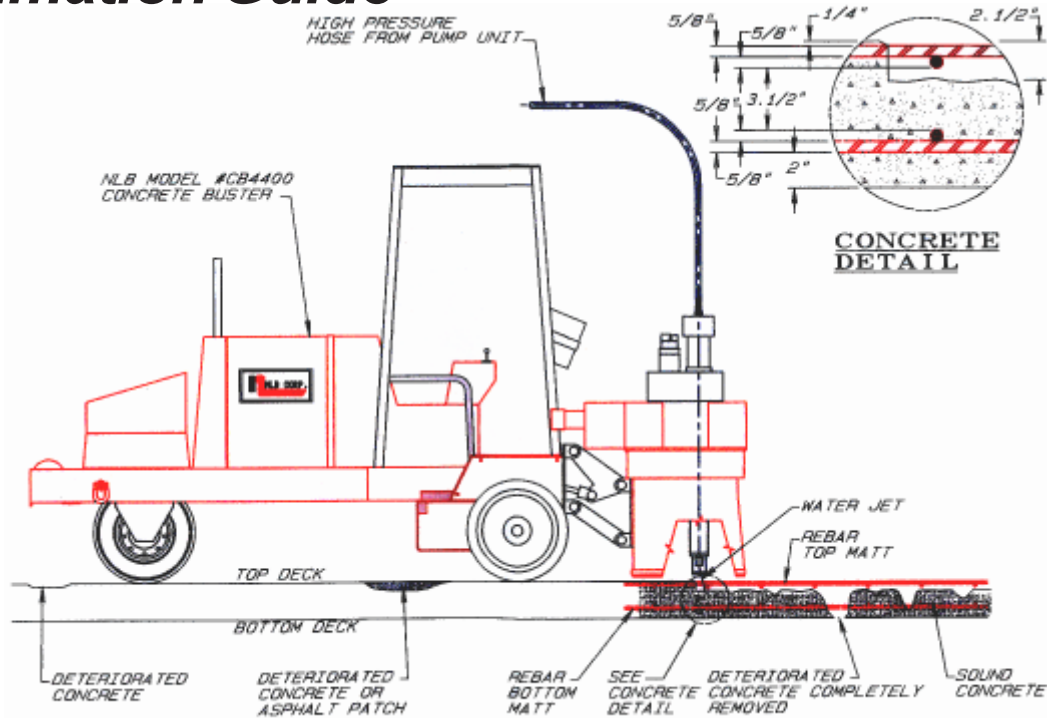

Estimated Production Rates for Hydrodemolition

Equipment: NLB Model 20600D and 4400 Robot
 Concrete: Bridge deck 4,000psi concrete milled surface with 3/4" crushed stone aggregate.

Depth of Removal	Estimated Production Rate
3/4" - 18mm	40 to 60 sq. metres per hour
1" - 25mm	35 to 55 sq. metres per hour
2" - 50mm	20 to 35 sq. metres per hour
3" - 75mm	15 to 25 sq. metres per hour
4" - 100mm	10 to 22 sq. metres per hour

Above production rates are based on contractor experience. Production rates may vary subject to aggregate size, compressive strength of concrete, number of rebar and size of rebar.



The Concrete Buster seeks out and removes delaminated concrete.

The Leader in High-Pressure Water Jet Technology