

NLB Mobile Lance Stand


Mobile Lance Stands

NLB Mobile Lance Stands are designed to reduce operator fatigue, so personnel can be rotated less frequently. Strict construction quality allows for maximum operator safety.


Models: Up to 36,000psi (2,480bar)

FEATURES/BENEFITS:

- Lance Stand absorbs back thrust, minimising operator fatigue.
- Operator stands on a non-skid surface.
- Allows operator to use more volume and pressure to remove hard-to-clean build-up.
- Instantaneous dump to low pressure when trigger is release.
- Air-Actuated Dump Valve, totally Enclosed, accessible for routine valve maintenance.
- Pneumatic tyres and rubber hand grips provided for fast, easy re-location.
- High pressure valve-to-lance hose is covered by a safety shroud.
- Discharge jet to work area distance is controlled by adjusting discharge pipe lengths by a locating pin just behind the pivot point.
- A 60-degree pivot point allows for horizontal and vertical cleaning coverage, reducing the number of station moves.

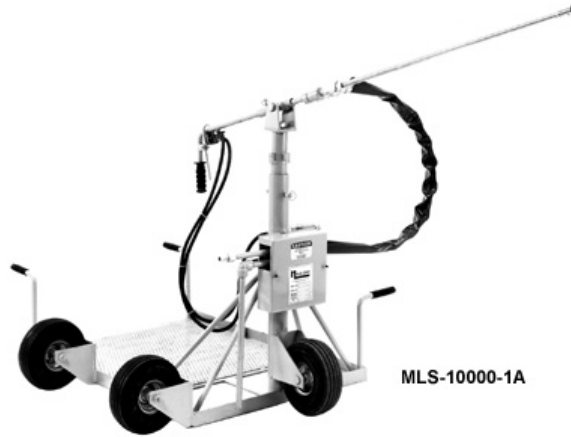

MLS-10000-1A

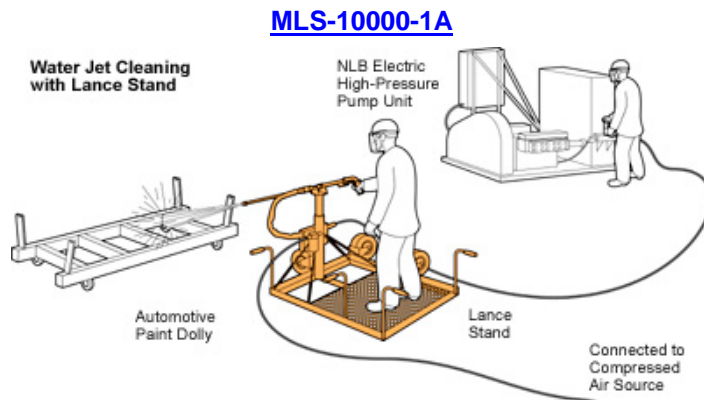

MLS-10000-1A

Model #	Max. Pressure	Max. Flow
MLS-10000-1A	10,000 psi (700 bar)	43 gpm (163 lpm)
MLS-20000-1A	20,000 psi (1400 bar)	21 gpm (79 lpm)

* Both models are pneumatic dump-style units.
 Model [MLS-10000-1A](#) is also available as a dry shut-off unit.

Prices List:

MLS-10000-1A (10,000psi WP).....£TBC
 MLS-20000-1A (20,000psi WP).....£TBC
 MLS-36000-1A (36,000psi WP).....£TBC

All prices quoted are: Ex Works, Ex Vat.